

# HS-10W-ABS

## 10 Watts Horn Loudspeaker



**EN 54 24**

- High sound pressure level
- Weather-proof
- BS 5839



EN 54-24:2008  
Ref. Nr.: 003-13  
ID-Code: SAA-LS03  
0068-CPR-XXXX

AUDEMO-SYSTEMS GmbH Schatzbogen 62  
81829 München, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

### APPLICATION

- Public Address and Voice Alarm
- Background Music
- Audio Visual

### AREA OF USE

- Health
- Education
- Retail
- Hospitality
- Stadiums
- Transportation
- Theme parks
- Military

### OVERVIEW


The 10W powered speaker is equipped with a 100V line transformer with 4 power adjustments, also low-impedance operation (20 ohm) is possible. The impact-resistant ABS housing UL94V0 in RAL 7035 guarantees long-term stability. For additional reliability, a ceramic block and a thermal fuse is provided.

The speaker is also secured with the high protection class IP 66 against the security risks of environmental influences. The speaker is compliant with the British Standard BS 5839, Part 8.

The PG11 cable glands on the back of the speaker allow quick and easy connection.


Included is a U-shaped, stainless steel universal mount for flexible installation. Optionally available is a mast bracket (MB) for about 90 - 200mm mast diameter.

To operate the product according EN 54-24, an equalizer has to be used as described in the user manual.





POLAR DIAGRAMS

Copyright by Four-Audio GmbH & Co KG Licensed to AAC

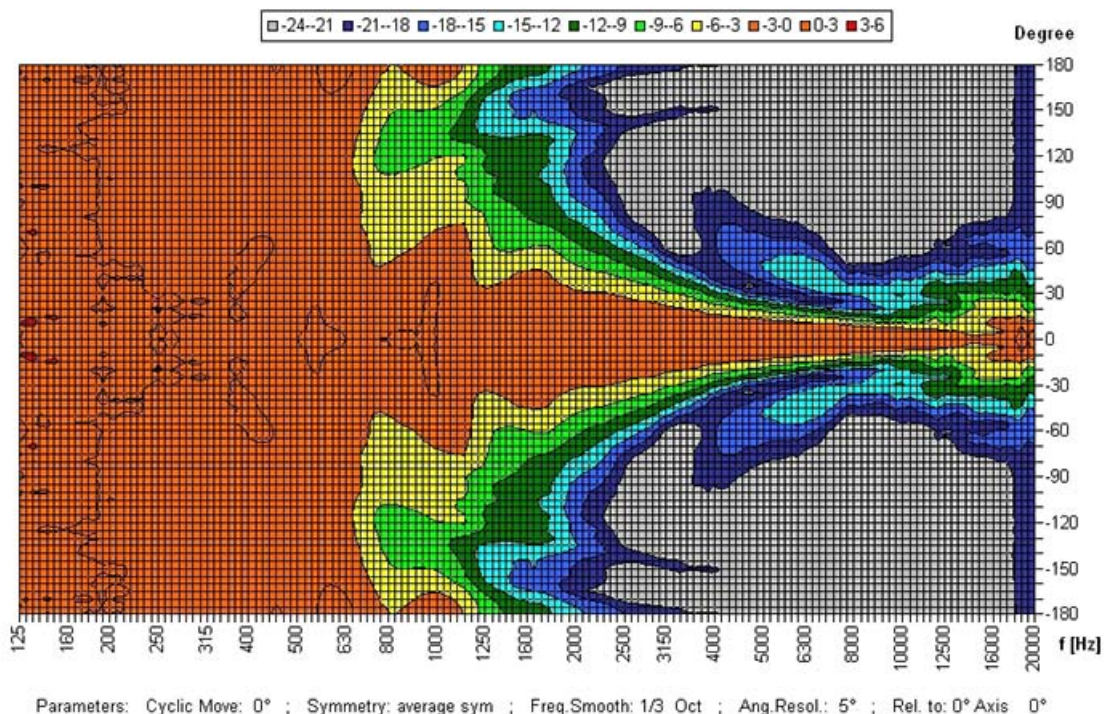



Copyright by Four-Audio GmbH & Co KG Licensed to AAC

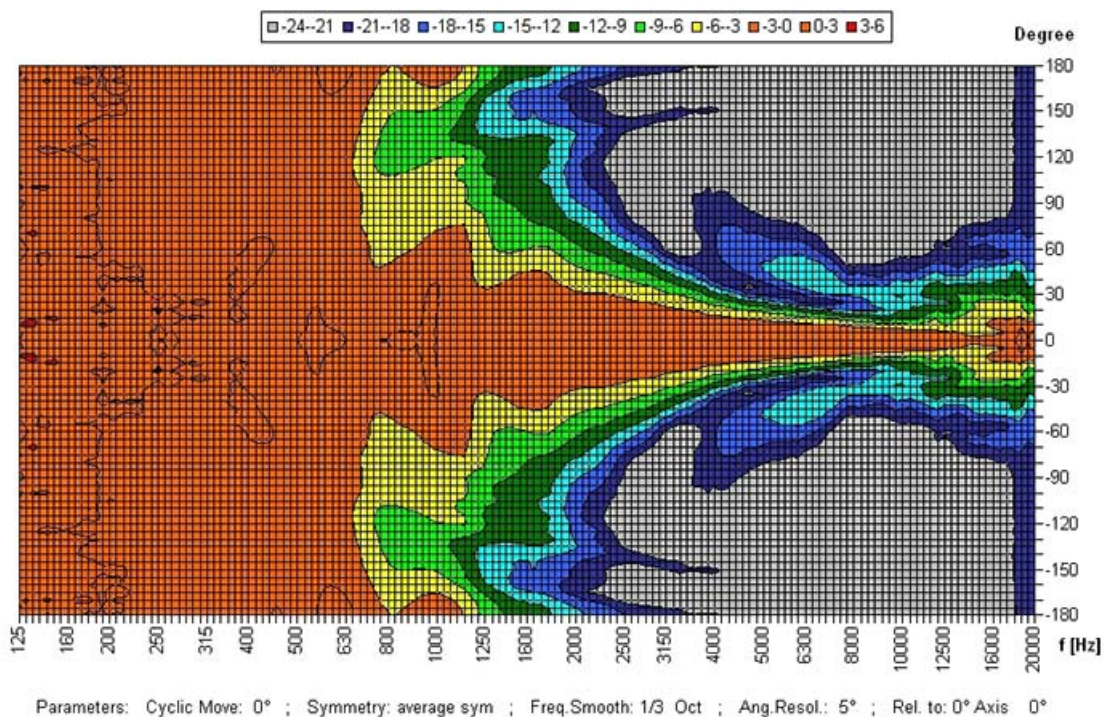





**FREQUENCY RESPONSE DIAGRAMS**

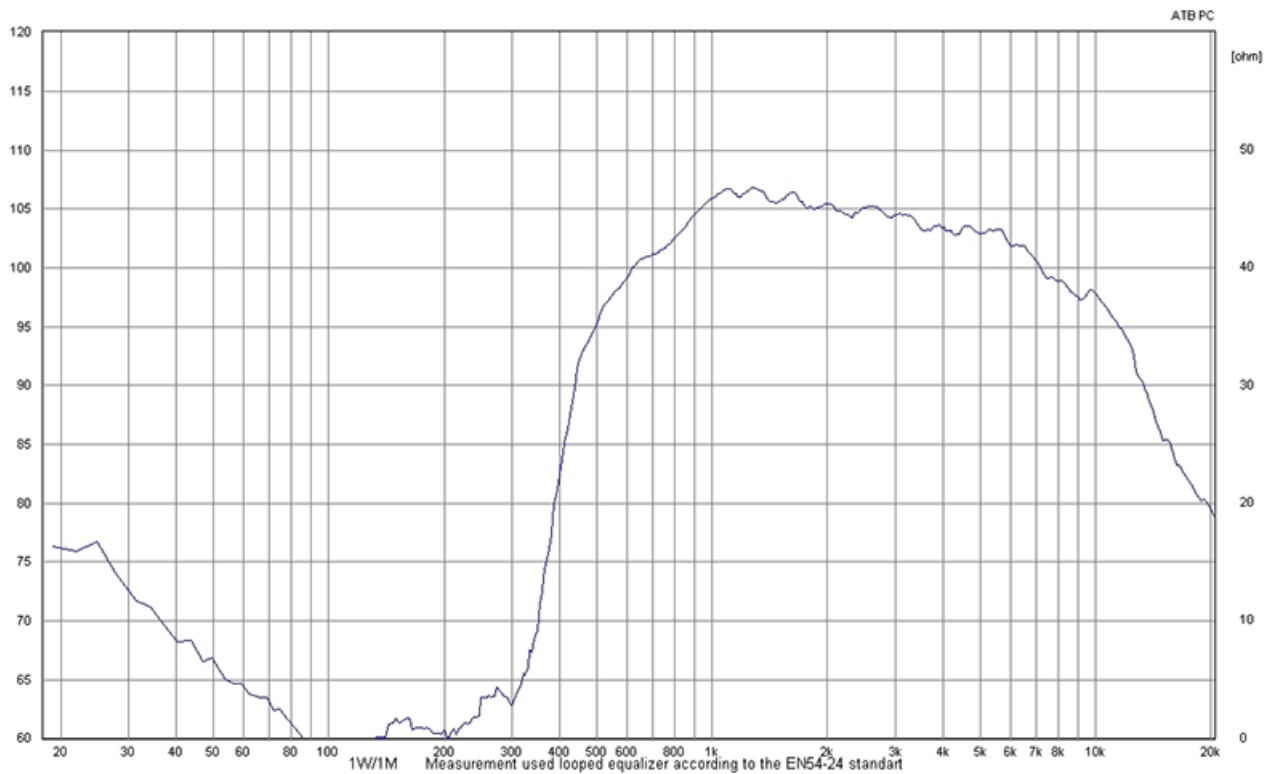



**TECHNICAL DIAGRAMS**

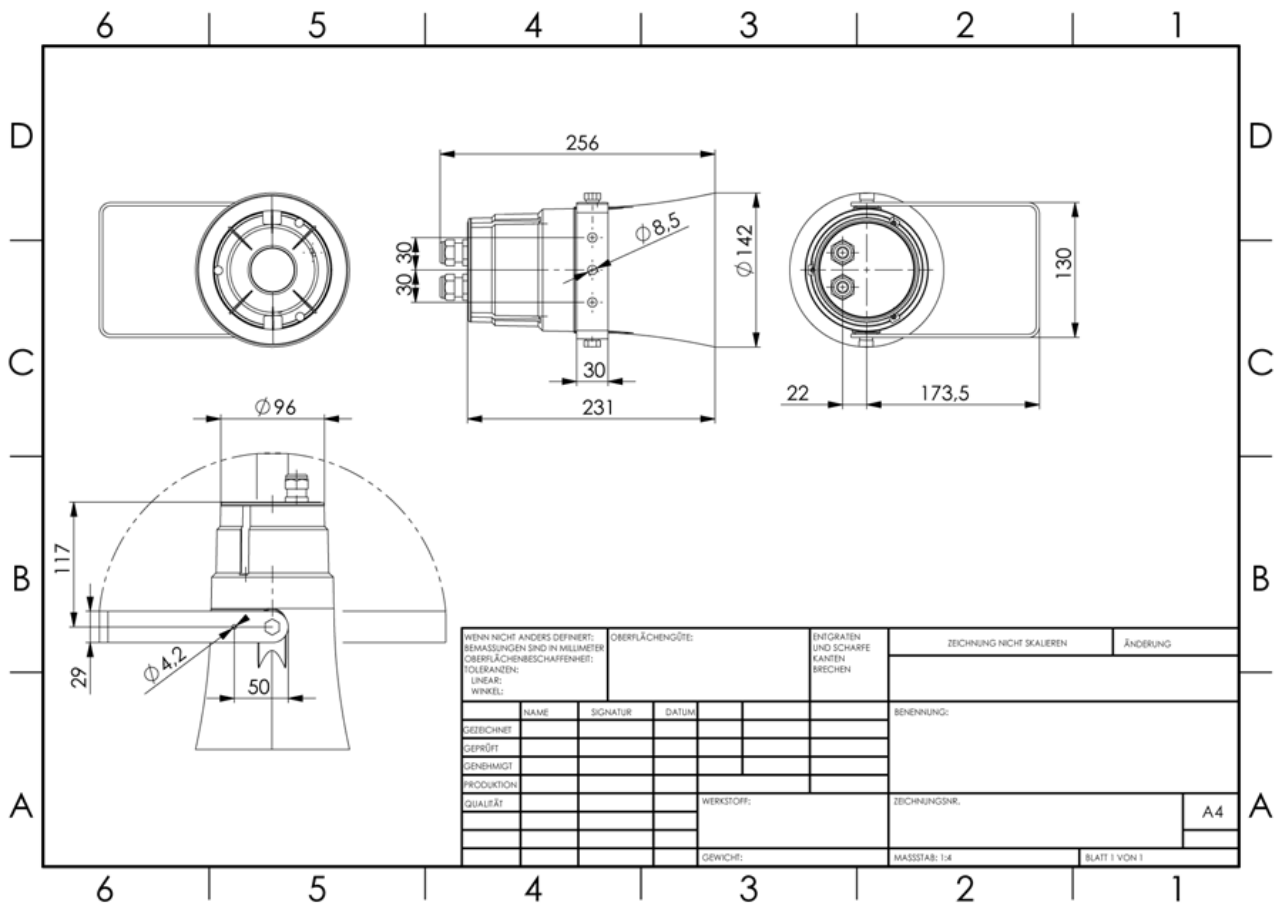



## TECHNICAL DATA (ELECTRICAL)

Description	HS-10W-ABS
Power	10/5/2,5/1,25 (20) W
Impedance (100V)	1000/2000/4000/8000 ohm
Frequency Range	569 - 7.000 Hz
Frequency Response	370 - 13.600 Hz
Sensitivity, IEC268-5, 1W/1m	106,7 dB
Sensitivity, rated noise power / 4m	91,0 dB
Sensitivity EN54-24, 1W/4m	83,0 dB
Sensitivity EN54-24, 1W/1m	95,0 dB
Sensitivity 1W/1m @ 1KHz	102 dB
Dispersion -6dB, 500Hz	h/v 360°
Dispersion -6dB, 1KHz	h/v 360°
Dispersion -6dB, 2KHz	h/v 105°
Dispersion -6dB, 4KHz	h/v 50°

## TECHNICAL DATA (MECHANICAL)

Dimensions	142x256 mm
IP Rating	IP66
Weight (net)	1,9 kg
Temperature range	-25 / +70 C°
Mounting	Mounting bracket
Connector	ceramic block
Maximum cable cross section	8mm <sup>2</sup>
Max. cable cross section loop	2x2mm <sup>2</sup>
Colour	RAL 7035

**All rights reserved.**

Information contained in this document is believed to be accurate, however no representation or warranty is given and Audemo-systems in Germany assumes no liability with respect to the accuracy of such information.



Member of the ZVEI - Central Association  
for the Electrical Engineering and Electrical  
Industry eV Safety Association



**AUDEMO - SYSTEMS GmbH (Headquarter)**

Schatzbogen 62 81829 Munchen  
Tel.: +49 (0) 89 1 4 56 78 47 - 0, Fax: +49 (0) 89 1 4 56 78 47- 2900  
info@audemo-systems.de, www.audemo-systems.de