

## PB-3250WA

### 2-Way Coaxial Horn Loudspeaker

Made  
in  
Germany

**EN 54 24**



- Outdoor application
- Strong beam type sound
- IP 66



EN 54-24:2008  
Ref. Nr.: 022-04A  
ID-Code: SAA-LS28  
0068-CPR-180/2023

AUDEMO-SYSTEMS GmbH Schatzbogen 62  
81829 München, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

#### APPLICATION

- Public Address and Voice Alarm
- Outdoor application
- Background Music

#### AREA OF USE

- Health • Education • Retail • Hospitality
- Stadiums • Transportation • Theme parks • Military

#### OVERVIEW

The 2-way coaxial horn speaker is engineered for outdoor applications with superb foreground sound and EN54 certification. The PB-3250WA delivers a smooth and powerful beam-type sound for a large range of venues, such as airports, mega-stores, stadiums and many more.


The 150W powered professional speaker is equipped with an impressive 2-way bass-reflex system, consisting of an 8" woofer and a high-performance HF-driver with crossover at 2.5kHz.

The speaker offers 3 different 100V power tapplings, low impedance operation is also possible.



The sturdy high-impact ABS housing in white with a metal hexagon-shaped aluminium grille offers IP66 enclosure protection. Connection is easily done by a screw-terminal at the rear of the speaker, protected by a cover plate with 2 x PG11 cable glands. The metal mounting bracket with adjustable inclination enables simple and safe installation. A safety rope is included in the delivery..



**FREQUENCY RESPONSE DIAGRAMS**

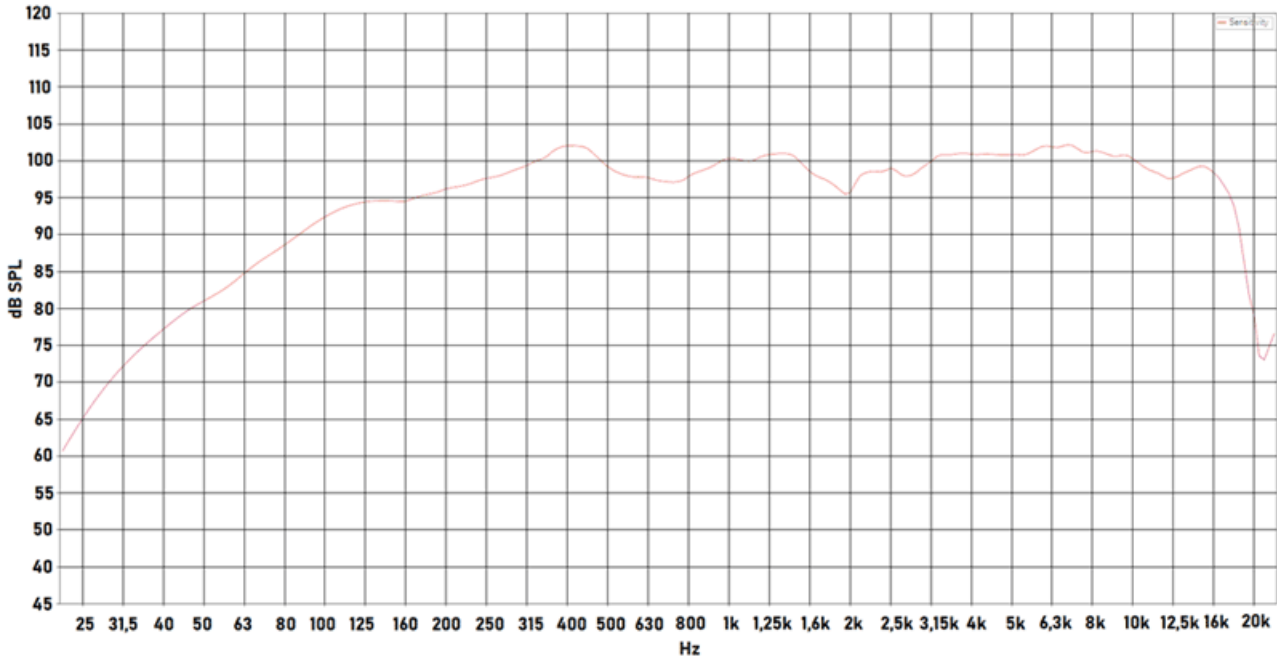


**POLAR DIAGRAMS**

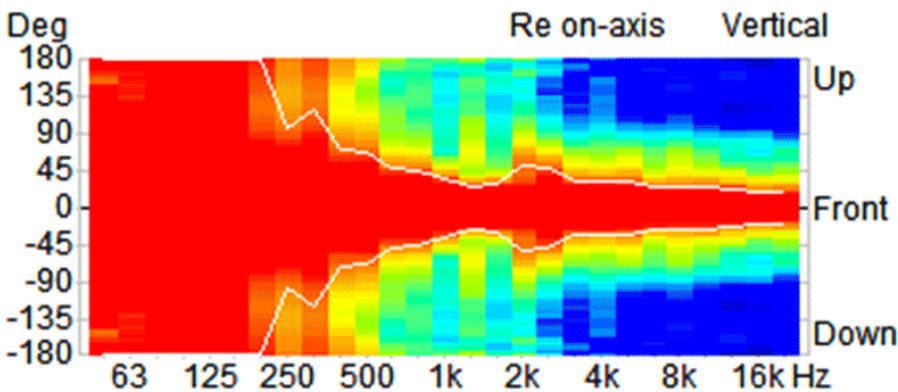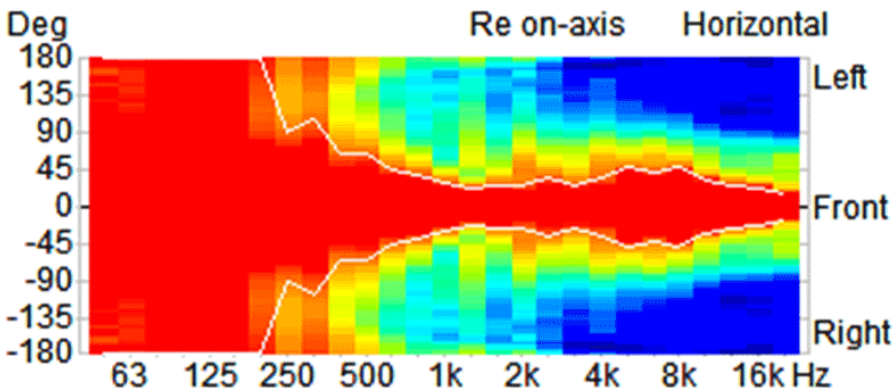

**PADES**<sup>®</sup> 2000-Series



## TECHNICAL DIAGRAMS

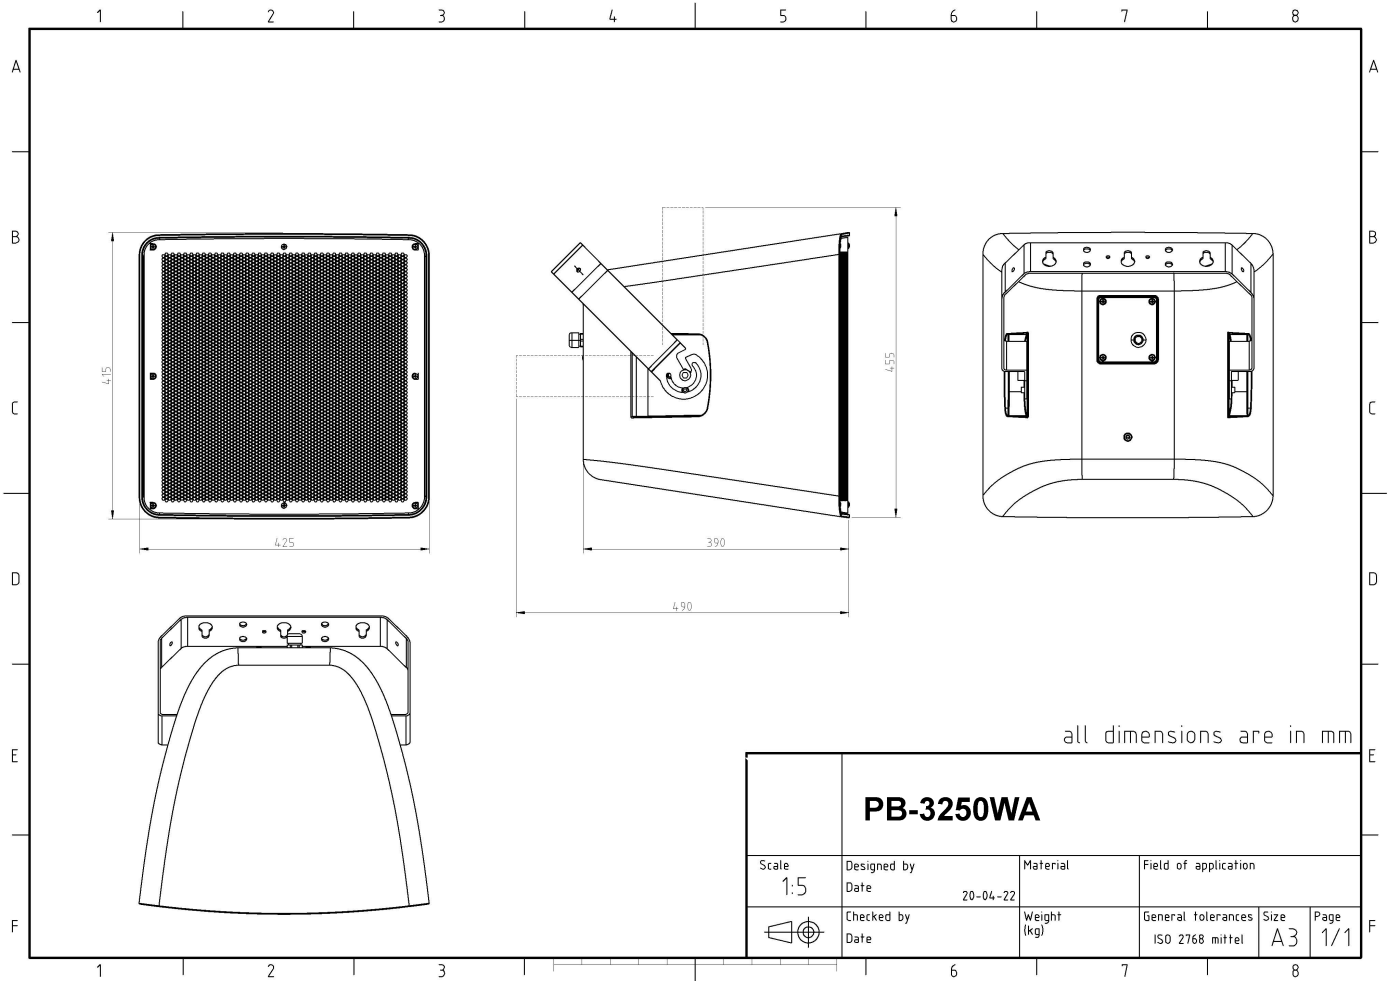



## TECHNICAL DATA (ELECTRICAL)

Description	PB-3250WA
Power	250/125/63W (8ohm)
Impedance (100V)	40/80/158 ohm
Frequency Range	85 - 19.000 Hz
Frequency Response	75 - 20.000 Hz
Sensitivity 1W/1m, peak	103 dB
Sensitivity , 1W/4m, peak	91,0 dB
Sensitivity Pmax/4m, peak	115 dB
Sensitivity , rated noise power / 4m	108 dB
Sensitivity EN54-24, 1W/4m	86,0 dB
Sensitivity 1W/1m @ 1KHz	100 dB
Dispersion -6dB, 500Hz	h 130° / v 135°
Dispersion -6dB, 1KHz	h 60° / v 60°
Dispersion -6dB, 2KHz	h 55° / v 55°
Dispersion -6dB, 4KHz	h 85° / v 60°

## TECHNICAL DATA (MECHANICAL)

Dimensions	390x425x418mm
IP Rating	IP66
Weight (net)	20,85 kg
Temperature range	-25 / +70 °C
Mounting	Mounting bracket
Connector	4-pin screw terminal
Maximum cable cross section	4,9 mm <sup>2</sup>
Max. cable cross section loop	4,9 mm <sup>2</sup>
Colour	white

### All rights reserved.

Information contained in this document is believed to be accurate, however no representation or warranty is given and Audemo-systems in Germany assumes no liability with respect to the accuracy of such information.



Member of the ZVEI - Central Association  
for the Electrical Engineering and Electrical  
Industry eV Safety Association



**PADES**  <sup>®</sup> 2000-Series

### AUDEMO - SYSTEMS GmbH (Headquarter)

Schatzbogen 62 81829 München  
Tel.: +49 (0) 89 1 4 56 78 47 - 0, Fax: +49 (0) 89 1 4 56 78 47- 2900  
info@audemo-systems.de, www.audemo-systems.de